

Stereo Correspondence Constraints

Robert B. Fisher School of Informatics University of Edinburgh

©2014, School of Informatics, University of Edinburgh


Stereo Correspondence Slide 3/12

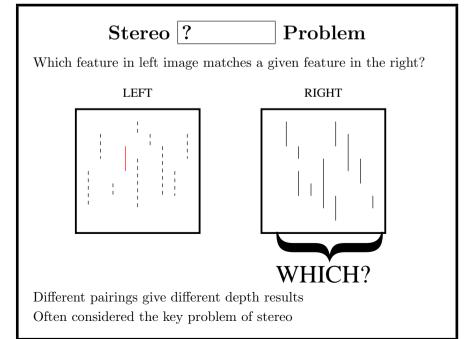


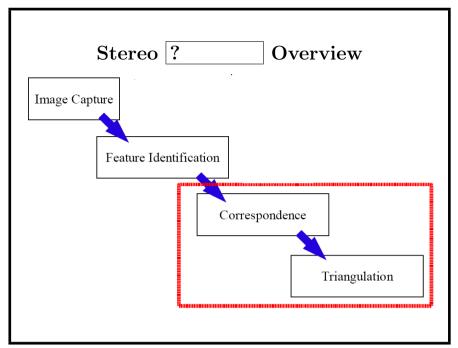

©2014, School of Informatics, University of Edinburgh

Stereo Correspondence Slide 4/12

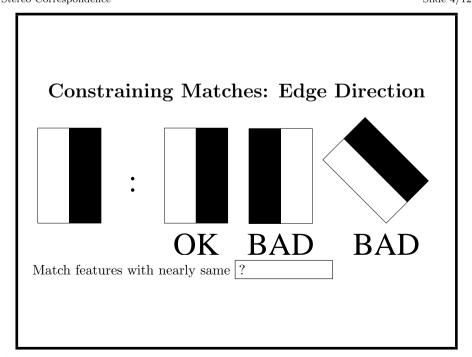

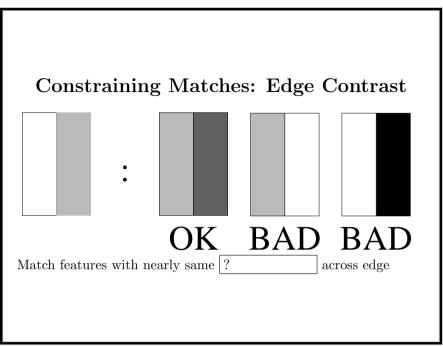

©2014, School of Informatics, University of Edinburgh


Stereo Correspondence Slide 7/12

Constraining Matches: Uniqueness and Smoothness

? : match features giving nearly same depth as neighbors


Uniqueness: a feature in one image can match from the other image:

- 0 occlusion
- 1 normal case
- 2+ transparencies, wires, vines, etc from coincidental alignments

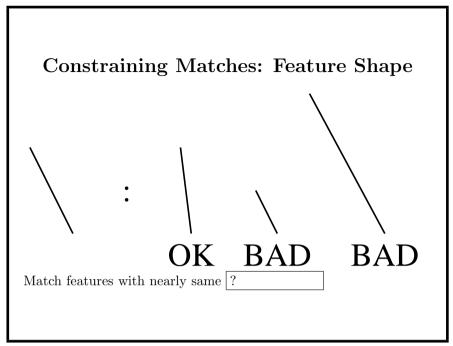

©2014, School of Informatics, University of Edinburgh

Stereo Correspondence Slide 8/12

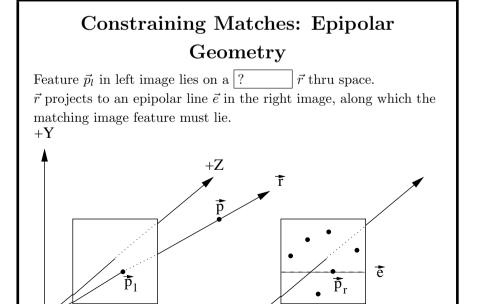

©2014, School of Informatics, University of Edinburgh

Images are linked by the Fundamental matrix F

Epipolar line is defined by: $\vec{e} = F\vec{p}_l$

Matched points satisfy $\vec{p}'_{r}\vec{e} = 0$


Reduces 2D search to ?

If images are 'rectified', then the epipolar line is an image row

©2014, School of Informatics, University of Edinburgh

Stereo Correspondence Slide 11/12

Constrained Matches Block 2 Lines 92 & 64 did not match (? difference related to line positions)

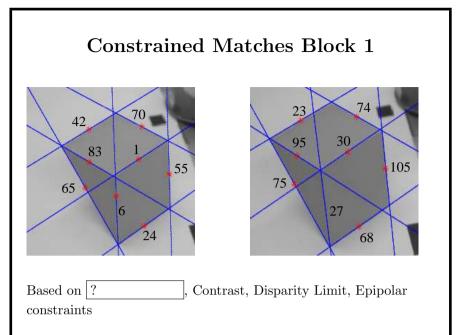

©2014, School of Informatics, University of Edinburgh

Stereo Correspondence Slide 12/12

What We Have ?

- A set of correspondence constraints
- The epipolar constraint