

Basic Dense Stereo Depth Calculation

Robert B. Fisher
School of Informatics
University of Edinburgh

Dense Depth Data

Problem: have depth only at triangulated feature locations


Solution 1: Linear interpolate known values at all other pixels

Solution 2: Correlation-based stereo

Use pixel neighborhoods as features


Triangulate depth at every pixel

But needs to find matching pixel - not easy

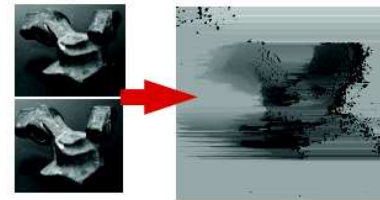

Correlation based stereo

- Use stereo image pair
- Features are neighborhoods at each pixel




- Match using similarity metric: SSD - Sum of Squared Differences (of pixel values) of left image at (u, v) to right image at (r, s) :

$$SSD(u, v, r, s) = \sum_{i=-\frac{N}{2}}^{\frac{N}{2}} \sum_{j=-\frac{N}{2}}^{\frac{N}{2}} (L(u+i, v+j) - R(r+i, s+j))^2$$


Finding best match

For each scanline on rectified image pair:

1. Build array of all possible matching scores

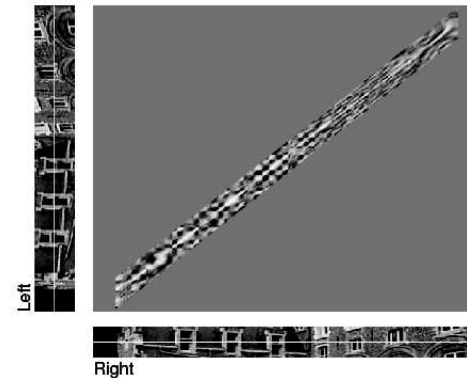


2. Dynamic programming finds lowest cost path (bright line thru middle of array above - optimisation problem)

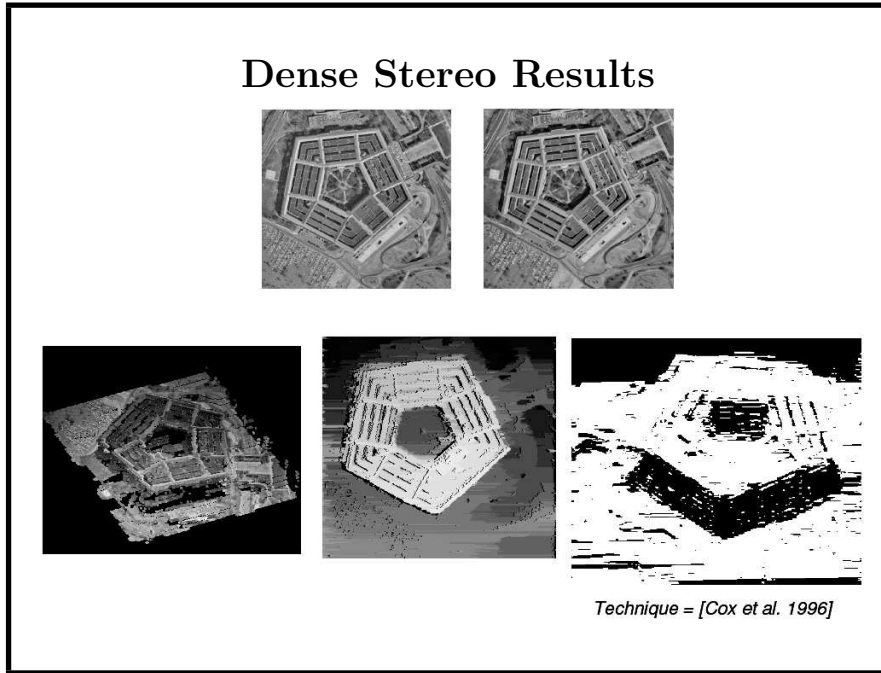

©2014, School of Informatics, University of Edinburgh



©2014, School of Informatics, University of Edinburgh

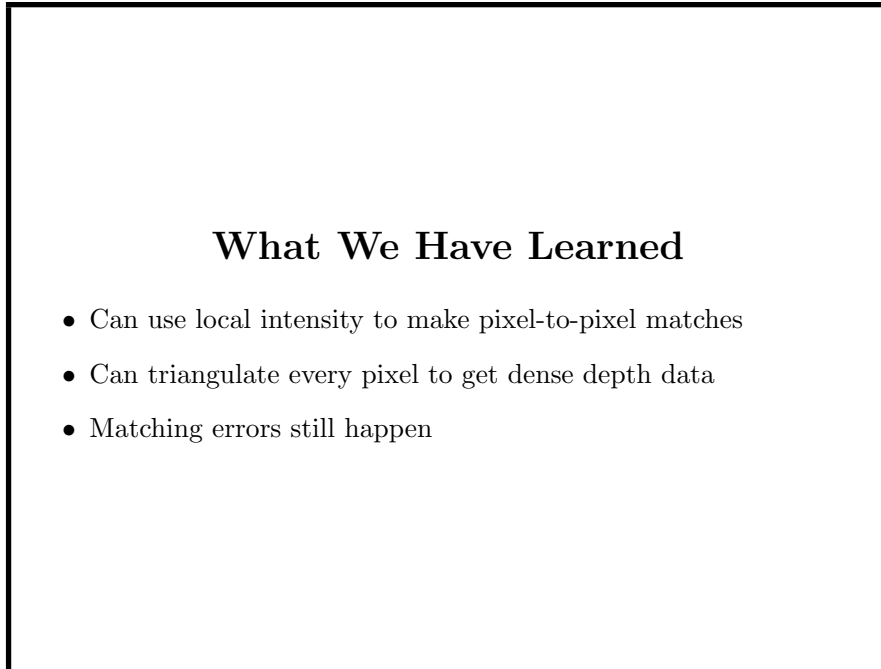

©2014, School of Informatics, University of Edinburgh