


MIZAR in MathWiki

Adam Naumowicz

`adamn@mizar.org`

Institute of Computer Science

University of Bialystok, Poland

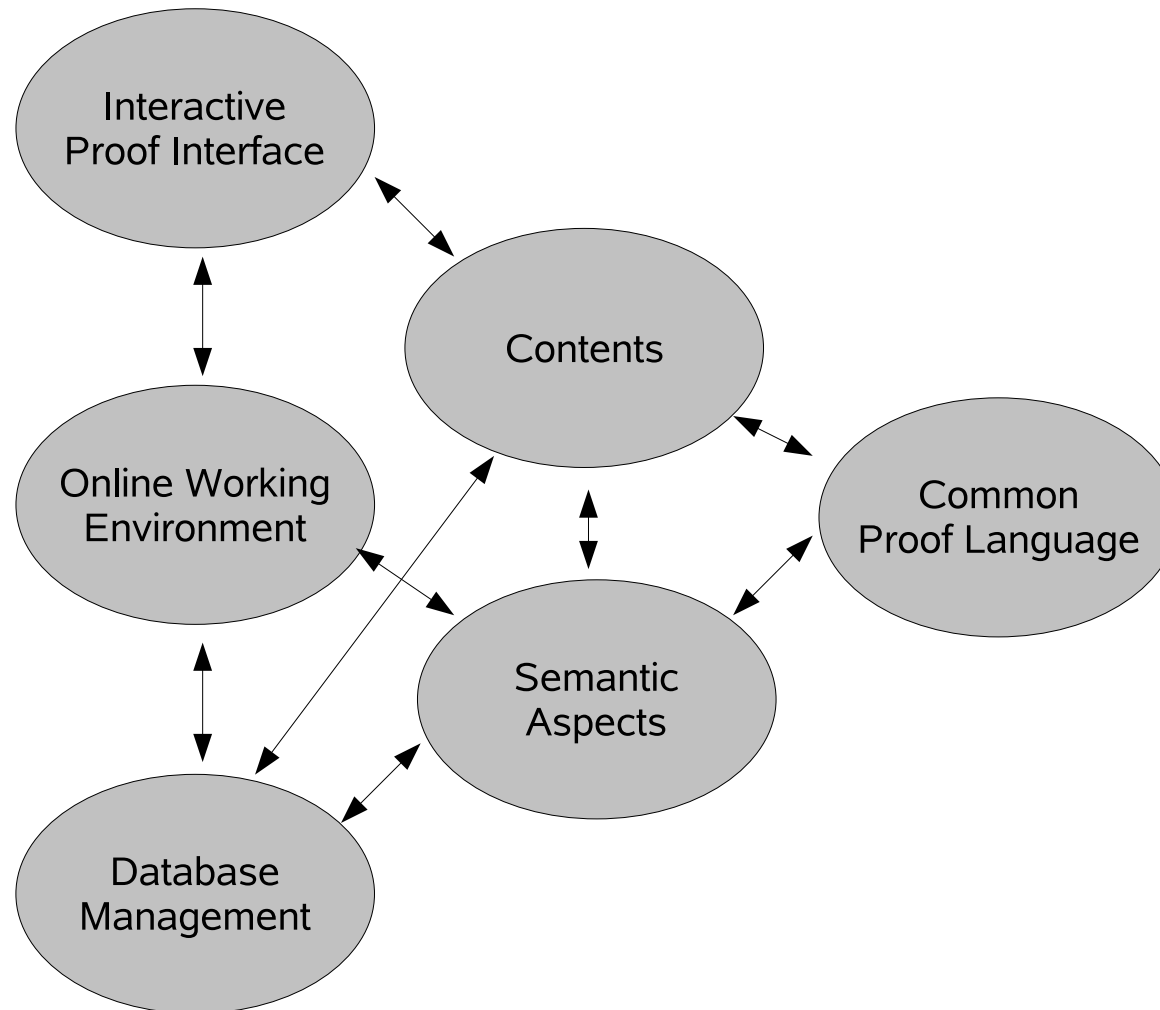

- MIZAR is a command line (“batch”) tool
 - “lazy interaction”
 - stepwise refinement

- MIZAR is a command line (“batch”) tool
 - “lazy interaction”
 - stepwise refinement
- processing incomplete proofs is done in a “natural” way

- MIZAR is a command line (“batch”) tool
 - “lazy interaction”
 - stepwise refinement
- processing incomplete proofs is done in a “natural” way
- a local database can be created and distributed among users

- MIZAR is a command line (“batch”) tool
 - “lazy interaction”
 - stepwise refinement
- processing incomplete proofs is done in a “natural” way
- a local database can be created and distributed among users
- several collaborative projects (CCL, JORDAN)

- MIZAR on-line processors, e.g. <http://www.wakasato.org/mizar/>

- MIZAR on-line processors, e.g. <http://www.wakasato.org/mizar/>
- binary distribution on several platforms - fairly easy to install!

- MIZAR on-line processors, e.g. <http://www.wakasato.org/mizar/>
- binary distribution on several platforms - fairly easy to install!
- moderate resources required

- MIZAR on-line processors, e.g. <http://www.wakasato.org/mizar/>
- binary distribution on several platforms - fairly easy to install!
- moderate resources required
- most advanced interface - Emacs-mode by Josef Urban

- MIZAR on-line processors, e.g. <http://www.wakasato.org/mizar/>
- binary distribution on several platforms - fairly easy to install!
- moderate resources required
- most advanced interface - Emacs-mode by Josef Urban
- hybrid solution is probably most feasible (on/off-line work)

- MML is subject to constant revisions!

- MML is subject to constant revisions!
 - e.g. the arithmetic of real numbers
 - better formulation
 - employing new features (adjectives)

- MML is subject to constant revisions!
 - e.g. the arithmetic of real numbers
 - better formulation
 - employing new features (adjectives)
- integrity
 - e.g. two approaches to lattice theory

- MML is subject to constant revisions!
 - e.g. the arithmetic of real numbers
 - better formulation
 - employing new features (adjectives)
- integrity
 - e.g. two approaches to lattice theory
- notations
 - 120 different +’s
 - overloading and redefinitions

- MML is subject to constant revisions!
 - e.g. the arithmetic of real numbers
 - better formulation
 - employing new features (adjectives)
- integrity
 - e.g. two approaches to lattice theory
- notations
 - 120 different +’s
 - overloading and redefinitions
- Encyclopedia of Mathematics in Mizar (EMM) - better organised

- MML is subject to constant revisions!
 - e.g. the arithmetic of real numbers
 - better formulation
 - employing new features (adjectives)
- integrity
 - e.g. two approaches to lattice theory
- notations
 - 120 different +’s
 - overloading and redefinitions
- Encyclopedia of Mathematics in Mizar (EMM) - better organised
- dividing into classical/abstract parts or arithmetic-dependent/arithmetic-independent parts

- Mizar Mathematical Library (version 4.87.985) includes:
 - 985 articles written by 198 authors
 - 45002 theorems
 - 8524 definitions
 - 753 schemes
 - 7511 registrations
 - 6320 symbols

- Mizar Mathematical Library (version 4.87.985) includes:
 - 985 articles written by 198 authors
 - 45002 theorems
 - 8524 definitions
 - 753 schemes
 - 7511 registrations
 - 6320 symbols
- refereeing process started in 2006 (“human judgement what is good and what is not”)

- Mizar Mathematical Library (version 4.87.985) includes:
 - 985 articles written by 198 authors
 - 45002 theorems
 - 8524 definitions
 - 753 schemes
 - 7511 registrations
 - 6320 symbols
- refereeing process started in 2006 (“human judgement what is good and what is not”)
- traditional refereeing - “positive” (printing costs, not easy access, only most important results are published) - *Why should that be accepted?*

- Mizar Mathematical Library (version 4.87.985) includes:
 - 985 articles written by 198 authors
 - 45002 theorems
 - 8524 definitions
 - 753 schemes
 - 7511 registrations
 - 6320 symbols
- refereeing process started in 2006 (“human judgement what is good and what is not”)
- traditional refereeing - “positive” (printing costs, not easy access, only most important results are published) - *Why should that be accepted?*
- MML refereeing policy - “negative” (only really poor articles are rejected) - *Why should that be rejected?*

- Mizar Mathematical Library (version 4.87.985) includes:
 - 985 articles written by 198 authors
 - 45002 theorems
 - 8524 definitions
 - 753 schemes
 - 7511 registrations
 - 6320 symbols
- refereeing process started in 2006 (“human judgement what is good and what is not”)
- traditional refereeing - “positive” (printing costs, not easy access, only most important results are published) - *Why should that be accepted?*
- MML refereeing policy - “negative” (only really poor articles are rejected) - *Why should that be rejected?*
- Freek’s proposal (preliminaries section)

- Mizar Mathematical Library (version 4.87.985) includes:
 - 985 articles written by 198 authors
 - 45002 theorems
 - 8524 definitions
 - 753 schemes
 - 7511 registrations
 - 6320 symbols
- refereeing process started in 2006 (“human judgement what is good and what is not”)
- traditional refereeing - “positive” (printing costs, not easy access, only most important results are published) - *Why should that be accepted?*
- MML refereeing policy - “negative” (only really poor articles are rejected) - *Why should that be rejected?*
- Freek’s proposal (preliminaries section)
- authorship issues

- Formalized Mathematics: <http://fm.mizar.org/>

- Formalized Mathematics: <http://fm.mizar.org/>
- Journal of Formalized Mathematics: <http://mizar.org/JFM/>

- Formalized Mathematics: <http://fm.mizar.org/>
- Journal of Formalized Mathematics: <http://mizar.org/JFM/>
- XML-based semantic presentation:
http://lipa.ms.mff.cuni.cz/~urban/xmlmml/html_abstr.4.87.985/

- Formalized Mathematics: <http://fm.mizar.org/>
- Journal of Formalized Mathematics: <http://mizar.org/JFM/>
- XML-based semantic presentation:
http://lipa.ms.mff.cuni.cz/~urban/xmlmml/html_abstr.4.87.985/
- MMLQuery search language/engine: <http://mmlquery.mizar.org/>

- PA languages should still evolve in the direction of the natural language (to reduce the de Bruijn factor)

- PA languages should still evolve in the direction of the natural language (to reduce the de Bruijn factor)
 - adjectives, binders, ellipsis, etc.

- PA languages should still evolve in the direction of the natural language (to reduce the de Bruijn factor)
 - adjectives, binders, ellipsis, etc.
- we should support translations (translation into a language should be done by its “native” users), parallel developments, cross-linking facilities, etc.